




MQP-SERIES

MULTI-QUICK PROCESSORS

A proven system-since 2004



Demarec Power system

A unique cylinder technique, 20% more power and extremely fast cycle times!

Type	MQP-25-Y	MQP-30-Y
Carrier weight*	18-25 ton	22-35 ton
Opening/Closing Pmax	350 bar	350 bar
Flow	120-200 l/min	150-250 l/min
Rotation Pmax	140 bar	140 bar
Flow	40-60 l/min	40-60 l/min
Cycle time Opening/Closing	1,5 / 2,3 sec	2,0 / 2,3 sec..

Type	MQP-45-Y	MQP-60-Y
Carrier weight*	32-50 ton	45-65 ton
Opening/Closing	350 bar	350 bar
Flow	200-300 l/min	300-400 l/min
Rotation Pmax	140 bar	140 bar
Flow	40-60 l/min	40-60 l/min
	2,0 / 2,9 sec.	2,0 / 2,8 sec.

Type	MQP-25-C	MQP-25-D	MQP-25-P	MQP-25-S	MQP-25-T	MQP-25-U
Weight**	1960 kg	1950 kg	1990 kg	1900 kg	2050 kg	-
Closing force front tooth (ca.)	75 t	80 t	75 t	275 t***	270 t***	-
Jaw opening	785 mm	785 mm	790 mm	370 mm	330 mm	-
Width of upper jaw	90 mm	90 mm	325 mm	100 mm	100 mm	-
Width of lower jaw	375 mm	470 mm	400 mm	320 mm	265 mm	-
Depth	810 mm	810 mm	810 mm	560 mm	570 mm	-

Type	MQP-30-C	MQP-30-D	MQP-30-P	MQP-30-S	MQP-30-T	MQP-30-U
Weight**	2600 kg	2450 kg	2500 kg	2375 kg	2560 kg	2575 kg
Closing force front tooth (ca.)	90 t	95 t	90 t	310 t***	330 t***	100 t
Jaw opening	875 mm	870 mm	880 mm	410 mm	335 mm	590 mm
Width of upper jaw	100 mm	100 mm	350 mm	120 mm	120 mm	280 mm
Width of lower jaw	440 mm	470 mm	470 mm	355 mm	305 mm	500 mm
Depth	920 mm	900 mm	830 mm	600 mm	575 mm	790 mm

Type	MQP-45-C	MQP-45-D	MQP-45-P	MQP-45-S	MQP-45-T	MQP-45-U
Weight**	3200 kg	3150 kg	3250 kg	3015 kg	3160 kg	3090 kg
Closing force front tooth (ca.)	120 t	125 t	120 t	390 t***	425 t***	135 t
Jaw opening	990 mm	990 mm	980 mm	465 mm	390 mm	690 mm
Width of upper jaw	100 mm	100 mm	400 mm	120 mm	120 mm	310 mm
Width of lower jaw	450 mm	515 mm	515 mm	375 mm	305 mm	525 mm
Depth	975 mm	960 mm	945 mm	700 mm	630 mm	830 mm

Type	MQP-60-C	MQP-60-D	MQP-60-P	MQP-60-S	MQP-60-T	MQP-60-U
Weight**	4600 kg	4375 kg	4650 kg	4400 kg	4325 kg	-
Closing force front tooth (ca.)	140 t	145 t	140 t	440 t***	605 t***	-
Jaw opening	1150 mm	1175 mm	1150 mm	540 mm	400 mm	-
Width of upper jaw	100 mm	100 mm	450 mm	120 mm	150 mm	-
Width of lower jaw	480 mm	550 mm	560 mm	410 mm	355 mm	-
Depth	1050 mm	1090 mm	1050 mm	750 mm	660 mm	-

MQP-04-13-EN


*Depending of lifting capacity of carrier **Weight excluding standard bracket ***Mid up first blade

Subject to change without notice.

DemaGuide shear arm guiding system

- Jaw guided stabilization in front of and behind the pivot point (C- and S- Jaws).

- Rotary joint with extra channel for central greasing system and dust spraying system (option).

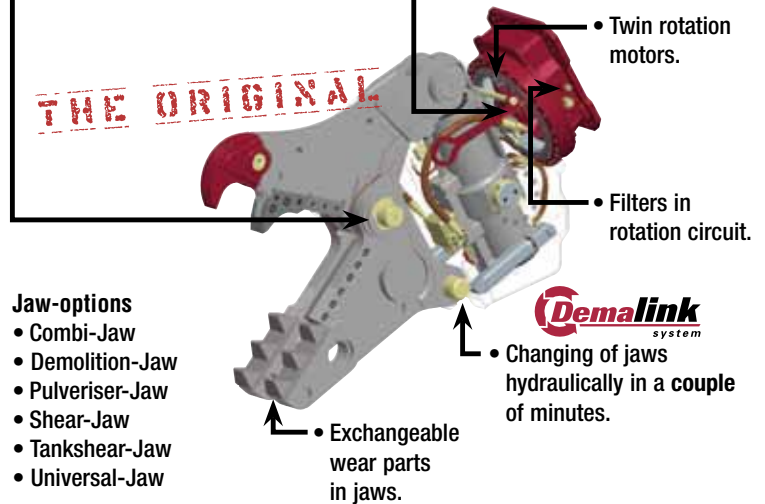

Jaw-options

- Combi-Jaw
- Demolition-Jaw
- Pulveriser-Jaw
- Shear-Jaw
- Tankshear-Jaw
- Universal-Jaw

Trendsetter in Demolition and Recycling Equipment

DEMAREC

Demolition and Recycling Equipment BV

Den Hoek 10 • 5845 EL St. Anthonis (NL)

Tel. +31(0)485 442300 • E-mail: info@demarec.com

demarec.com